


# OUTDOOR FLOOR STANDING LCD

Digital Signage

UB-A01

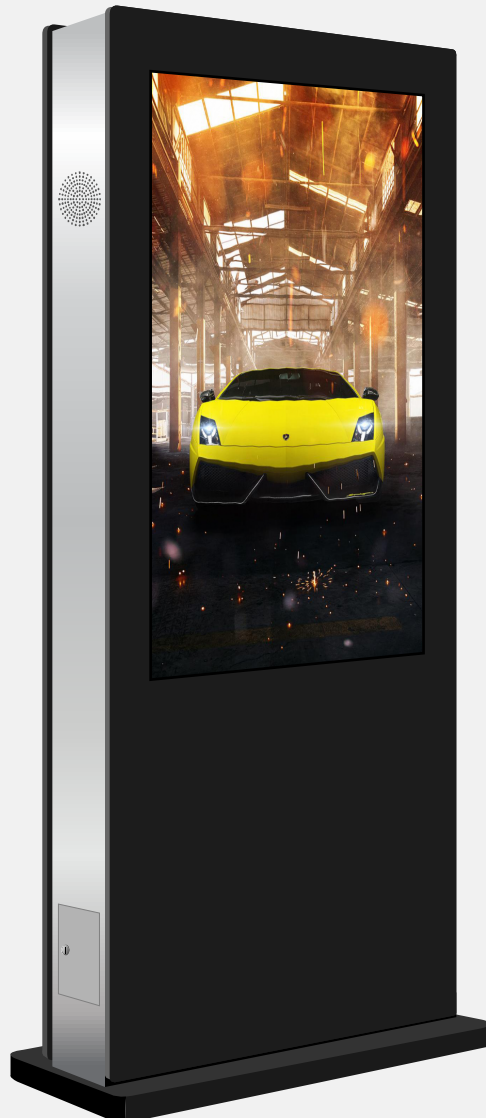

**USER**®

**SPECIAL DISPLAYS**

Creating Better Visions

Professional designs

All weather outdoor & high brightness solution

Smart temperature regulating technology

Anti-Glare, secured tempered front glass

# FUNCTIONS & PARAMETERS

- ▶ **Cabinet Design:** Professional, sleek new design while keeping you screen visible.
- ▶ **Brightness:** High brightness panels are available for direct sunlight visibility.
- ▶ **Light sensor:** Auto-adjust brightness control according to the ambient light.
- ▶ **Temperature Control:** Smart temperature technology will insure a constant even temperature inside the unit. Keeping the panel dry, preventing fog and condensation.
- ▶ **Weather:** Enclosed designed is IP55 and IP65 to insure a dust and water free cabinet.
- ▶ **Glass:** 6mm secure tempered front glass for best protection with anti-glare option.

Specifications			
Screen	49"	55"	65"
Resolution	1920*1080 DPI	1920*1080 DPI	1920*1080 DPI
Display Area	1078.8(H)x609(V) mm	1209.6(H)x680.4(V) mm	1428.48 (H) x 803.52 (V) mm
Dot pitch	0.63mm(H)*0.63mm(V)	0.63mm(H)*0.63mm(V)	0.63mm(H)*0.63mm(V)
Viewing Angle	H178, V178	H178, V178	H178, V178
Brightness	≥ 1500cd/m2	≥ 1500cd/m2	≥ 1500cd/m2
Contrast Ratio	≥ 4000:1	≥ 4000:1	≥ 4000:1
Colors	16.7M	16.7M	16.7M
Response time	5ms	5ms	5ms
Lifetime	≥ 60000 hours	≥ 60000 hours	≥ 60000 hours
Power	AC 100-240V ( 50/60Hz )	AC 100-240V ( 50/60Hz )	AC 100-240V ( 50/60Hz )
Power consumption	<600W	<600W	<600W
Standby power	<3W	<3W	<3W
Working temperature	-40°C ~ 55°C	-40°C ~ 55°C	-40°C ~ 55°C
Working humidity	20% ~ 80%	20% ~ 80%	20% ~ 80%
Frame	Unique safe design	Unique safe design	Unique safe design
Glass	6mm anti-vandal tempered glass ,avoid scratches	6mm anti-vandal tempered glass ,avoid scratches	6mm anti-vandal tempered glass ,avoid scratches
Back frame	Black steel plate	Black steel plate	Black steel plate
Product size	2000X800x280(mm)	2100*880*230(mm)	2280x1003.1x230(mm)

# DIMENSIONS 55 Inches

