
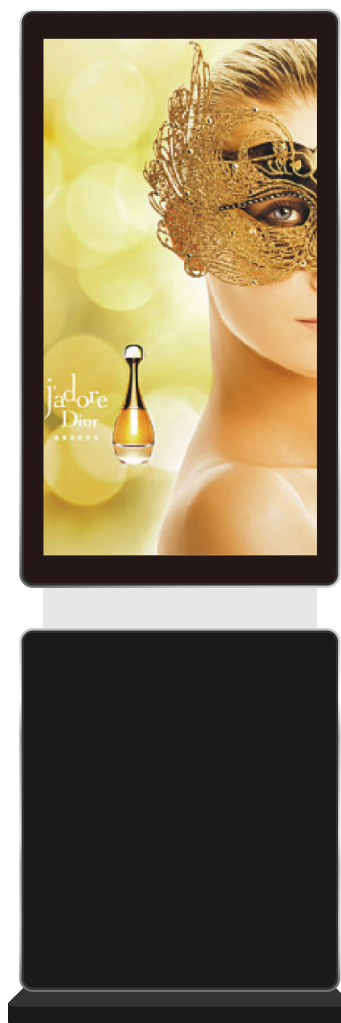


# ROTOTABLE Digital Signage **WITH PC** Embedded

UD-D01

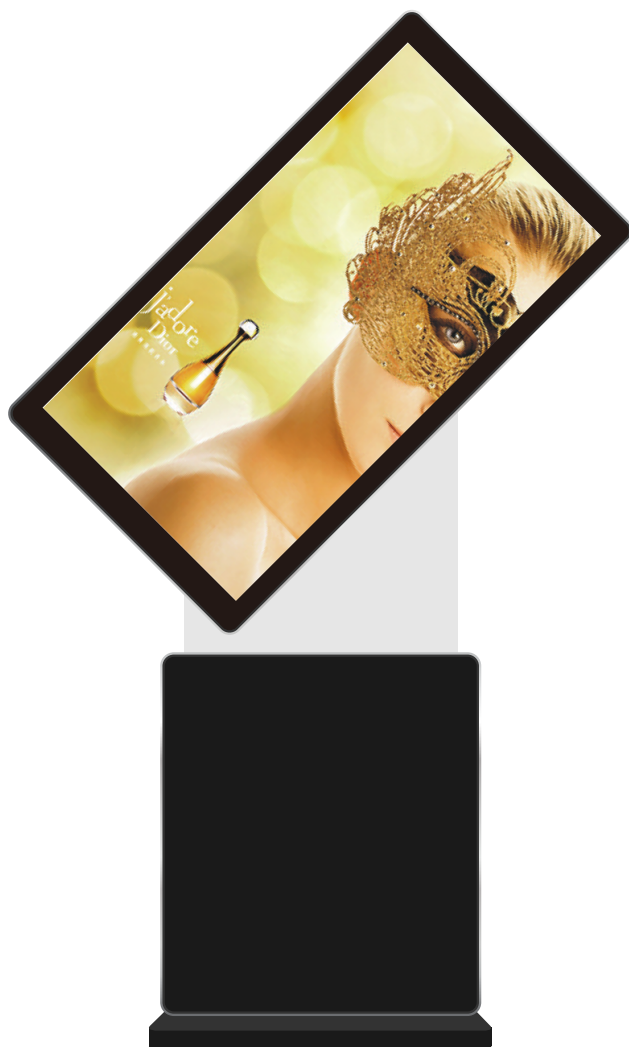

**USER**<sup>®</sup>

**SPECIAL DISPLAY**

Creating Better Visions

[Http://www.usersdt.net](http://www.usersdt.net)

High definition image, For perfect visual effects.

Split screen at random.

High-fidelity sound of quality.

IR two points touch screen .

# FUNCTIONS & PARAMETERS



Adopt high sensitive IR two points touch screen .



Can be upgraded to I3,I5 configuration.



178 degree viewing angle, using visual extension technology(S-PVA),when viewing images barrier, the picture no deformed , no color distortion.



Full metal shielding structure, effectively prevent external electromagnetic interference, no radiation.



Intelligent temperature control regulator, effective to protection the products hardware safety and performance.



5ms fast response, fast response time, eliminating the blur, ghosting and other distortion, ensure dynamic picture quality.



Professional grade A+ LCD screen, with grade A+ no bright dot screen with high contrast high brightness, could greatly improve the image layering, show the details better



With 3D noise reduction technology

## Specifications

	43"	49"	55"
Screen	43"	49"	55"
Resolution	1920*1080 DPI	1920*1080 DPI	1920*1080 DPI
Display Area	941.18(H) x 529.416(V)mm	1073.78(H)x604(V)mm	1210 ( H ) x 682 ( V ) mm
Dot pitch	0.63mm(H)*0.63mm(V)	0.63mm(H)*0.63mm(V)	0.63mm(H)*0.63mm(V)
Viewing Angle	H178, V178	H178, V178	H178, V178
Brightness	450cd/m2	450cd/m2	450cd/m2
Contrast	5000:1	5000:1	5000:1
Colors	16.7M	16.7M	16.7M
Response time	5ms	5ms	5ms
Lifetime	≥60000 hours	≥60000 hours	≥60000 hours
Power	AC 110-240V ( 50/60Hz )	AC 110-240V ( 50/60Hz )	AC 110-240V ( 50/60Hz )
Power consumption	100W	100W	100W
Standby power	<3W	<3W	<3W
Working temperature	-5°C ~ 60°C	-5°C ~ 60°C	-5°C ~ 60°C
Working humidity	10% ~ 80%	10% ~ 80%	10% ~ 80%
Frame	Aluminum profile	Aluminum profile	Aluminum profile
Glass	Tempered glass	Tempered glass	Tempered glass
Back frame	Wall Hanging	Wall Hanging	Wall Hanging
Product size			